

TYREinflate 200



Rapid Inflation Time

Inflate the tire to the desired pressure in ca. 4.5 minutes**



Wind-up Cable

Winding/unwinding mechanism for a neatly rolled up cable



Including three-piece adaptor kit

To inflate bicycles, balls and other inflatables



Rapid tyre inflator with wind-up cable

The OSRAM Tyreinflate 200 analogue tyre inflator inflates a 13" tyre from flat in up to 4.5 minutes**. It has a large on/off button for easy use. Its stable design keeps the inflator still while in use. Powered from an in-car 12V socket, the Tyreinflate 200's long 3m power cable makes reaching all the tyres around the vehicles easier. Shows pressure readings in kPA, bar and PSI. Includes storage compartment for tyre valve caps when being used. Comes with three-piece adaptor set for use with bicycle tyres, motorcycle tyres, balls and other inflatables.**based on inflating a 13" tyre from flat to 2.41 BAR

Product datasheet

Technical data


Product information

Order reference	OTI200
Inflation time	4.5 min
Max Pressure	5.5 bar
Air Hose Length	50 cm
Power Cord Length	3.0 m
Charge Time (h)	N/A
Display Size	50 mm
Measuring Units	PSI, kPa, bar
Accuracy (bar)	±0.1 bar
Flow rate (l/min)	tbc

Electrical data

Nominal wattage	120.00 W
Nominal voltage	11.1 V
Operating Voltage	12 V
Power Source	12 V Fused Plug

Dimensions & weight

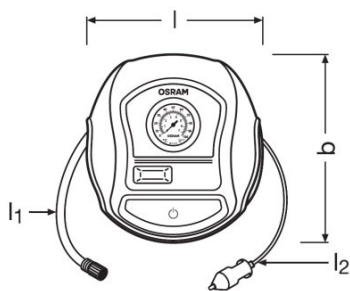

Length	197.0 mm
Width	79.0 mm
Height	180.0 mm

Additional product data

Display Type	Analogue
Noise Level (dB)	90 dB
Recommended to Use With	Car, Bicycle

Product datasheet

Capabilities

Accessories	Adaptors for: Balls, Air Mattress, Bikes
Fuse	10 A

Country specific categorizations

Order reference	OT1200
-----------------	--------



Detail



Detail



Detail



Detail



Detail



Detail

Product datasheet



Detail



Detail

Easy to use



Product Info Graphics

Intuitive to use



Product Info Graphics

Faster Inflation Get going quicker



Product Info Graphics

Easy to pack away



Product Info Graphics

What's in the box?



Product Info Graphics



Product Info Graphics






Logistical Data

Product datasheet

Product code	Product description	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Volume	Gross weight
4052899620209	TYRE inflate 200	Folding carton box 1	186 mm x 83 mm x 203 mm	3.13 dm ³	790.00 g
4062172166515	TYRE inflate 200	Shipping carton box 4	390 mm x 249 mm x 197 mm	19.13 dm ³	3472.00 g

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

Download Data

File
 User instruction TYREinflate 200
 Product movie TyreInflate How to Video (EN)
 Product movie TyreInflate 200 Product Video (EN)
 Video OSRAM TYREinflate 200: Rapid tyre inflator with wind-up cable
 Video OSRAM TYREinflate How To: Change your vehicle's tyre pressure easily

Safety advice

Product won't exceed noise levels of more than 90 dB

Legal advice

CE and EAC compliant

* for precise conditions please refer to: www.osram.com/am-guarantee

** based on inflating a 13" tyre from flat to 2.41 BAR

Application advice:

For more detailed application information and graphics please see product datasheet.

Disclaimer:

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

Application advice

For more detailed application information and graphics please see product datasheet.

Disclaimer

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.

OSRAM